UNIROYAL® LS24™

The Uniroyal® LS24™ gives you what you want in a long haul steer/all-position tire.

SmartWay® Verified

- **A LONG-LASTING, SmartWay® VERIFIED TIRE**
- **A TIRE DESIGNED TO COMBAT IRREGULAR WEAR**
- **A RETREADABLE TIRE WITH DuraShield® CONSTRUCTION**
- **AN AFFORDABLE, RELIABLE TIRE FROM A BRAND YOU KNOW AND TRUST**

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (1) mph	Loaded Radius		Overall Diameter		Overall Width (2)		Approved Wheels (Measuring wheel listed first)	Min. Dual Spacing (2)		Revs Per Mile	Max. Load Per Tire Single				Max. Load Per Tire Dual			
					in.	mm.	in.	mm.	in.	mm.		in.	mm.		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5	G	56682	18	75	19.2	488	41.1	1047	11.0	279	8.25, 7.50	12.5	318	503	6175	105	2800	720	5840	105	2650	720
275/80R22.5	G	63171	18	75	18.4	466	39.5	1003	10.8	274	8.25, 7.50	12.2	311	549	6175	110	2800	760	5675	110	2575	760
11R24.5	G	06873	18	75	20.2	515	43.2	1099	11.0	280	8.25, 7.50	12.5	318	497	6610	105	3000	720	6005	105	2725	720
275/80R24.5	G	90905	18	75	19.4	492	41.5	1054	10.8	274	8.25, 7.50	12.2	311	521	6175	110	2800	760	5675	110	2575	760

(1) Exceeding the lawful speed limit is neither recommended nor endorsed.
(2) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

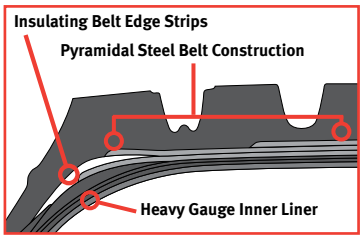

DuraShield® CONSTRUCTION

Uniroyal's unique features of pyramidal steel belt construction, insulating belt edge strips, and heavy gauge inner liner combine to deliver the durability and retreadability you want in a truck tire.

UNIROYAL®